



Features

- Miniature-size humidity probe
- Low power consumption
- Measurement range: 0–100 %RH; –40 ... +60 °C (–40 ... +140 °F)
- Cable detachable with standard M8 connector
- Rugged metal housing
- Interchangeable Vaisala INTERCAP® sensor
- Compatible with Vaisala Insight PC software and Vaisala Indigo80 Handheld Indicator
- Optional RS-485 digital output supports Modbus® RTU
- Optional dew/frost point, wet bulb temperature, absolute humidity, mixing ratio, and enthalpy output

Vaisala INTERCAP® Humidity and Temperature Probe HMP60 is a simple, durable and cost-effective humidity probe. It is suitable for volume applications, integration into other manufacturers' equipment, incubators, glove boxes, greenhouses, fermentation chambers, and data loggers.

Easy installation

The probe cable has a screw-on quick connector for easy installation. Different cable lengths are available. Also other compatible M8 series cables can be used. Accessories are available for different installation needs.

Low current consumption

HMP60 is suitable for battery-powered applications because of its very low current consumption.

Several outputs

Temperature measurement is a standard feature in HMP60, with dew point temperature, wet bulb temperature, absolute humidity, mixing ratio, and

enthalpy as optional calculated parameters. Four voltage output ranges are available. An optional RS-485 output with Modbus support is also available.

Flexible connectivity

In addition to analog and digital (Modbus) output options, the probe can also be used with Vaisala Indigo80 Handheld Indicator. For easy-to-use access to configuration and device analytics functionalities, the probe can be connected to Vaisala Insight PC software for Windows®. For more information, see vaisala.com/indigo80 and vaisala.com/insight.

Rugged design

HMP60 is designed for extreme conditions. The stainless steel body of HMP60 is classified as IP65. The probe has a sealed structure and the sensor is protected by a membrane filter and a plastic grid, or optionally by a stainless steel filter.

Recalibration not needed

The Vaisala INTERCAP® sensor is interchangeable. No recalibration is required; the sensor can simply be replaced, also in the field.

Technical data

Measurement performance

Relative humidity	
Measurement range	0–100 %RH
Typical accuracy:	
at 0 ... +40 °C (+32 ... +140 °F)	±3 %RH (0–90 %RH) ±5 %RH (90–100 %RH)
at –40 ... 0 °C and +40 ... +60 °C (–40 ... +32 °F and +104 ... +140 °F)	±5 %RH (0–90 %RH) ±7 %RH (90–100 %RH)
Humidity sensor	Vaisala INTERCAP®
Temperature	
Measurement range	–40 ... +60 °C (–40 ... +140 °F)
Accuracy:	
at +10 ... +30 °C (+50 ... +86 °F)	±0.5 °C (±0.9 °F)
at –40 ... +10 and +30 ... +60 °C (–40 ... +50 and +86 ... +140 °F)	±0.6 °C (±1.08 °F)
Analog outputs	
Accuracy at +20 °C (+68 °F)	±0.2 % of FS
Temperature dependence	±0.01 % of FS/°C (±0.006 % of FS/°F)

Inputs and outputs

Power consumption	1 mA average, max. peak 5 mA
Operating voltage ¹⁾	
With 1 V / 2.5 V output	5–28 V DC
With 5 V output	8–28 V DC
With loop power converter	8–28 V DC
With digital output	5–28 V DC
Start-up time	
Probes with analog output	4 s at operating voltage 13.5–16.5 V DC 2 s at other valid operating voltages
Probes with digital output	1 s
Outputs	
2 channels	0–1 V DC / 0–2.5 V DC / 0–5 V DC / 1–5 V DC
1-channel loop-power converter (separate module, compatible with humidity accuracy only)	4–20 mA
Digital output (optional)	RS-485 2-wire half duplex, supports Modbus RTU
External loads	
0–1 V	R _L min. 10 kΩ
Other voltage outputs	R _L min. 50 kΩ
Output parameters	
Relative humidity, temperature, dew/frost point temperature, wet bulb temperature, absolute humidity, mixing ratio, enthalpy	

¹⁾ Use lowest available operating voltage to minimize heating.

Operating environment

Operating temperature	–40 ... +60 °C (–40 ... +140 °F)
IP rating ¹⁾	IP65


¹⁾ Not applicable with the plastic grid filter.

Mechanical specifications

Body thread	M12×1 / 10 mm (0.4 in)
Cable connector	4-pin M8 (IEC 60947-5-2)
Materials	
Body	Stainless steel (AISI 316)
Grid filter	Chrome coated ABS plastic
Cable	Polyurethane or FEP
Weight	
Probe	17 g (0.6 oz)
Probe with 0.3 m (1 ft) cable	28 g (1 oz)

Compliance

EU directives and regulations	EMC Directive (2014/30/EU) RoHS Directive (2011/65/EU) as amended by 2015/863
Electromagnetic compatibility (EMC)	EN 61326-1, industrial environment
EMC emissions	CISPR 32 / EN 55032, Class B
Compliance marks	CE, RCM, UKCA

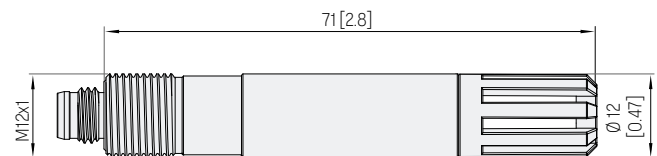

Dimensions in mm (inches)

Spare parts and accessories

Sensors

Vaisala INTERCAP® sensor, 1 pc	15778HM
Vaisala INTERCAP® sensor, 10 pcs	INTERCAPSET-10PCS

Sensor protection

Plastic grid filter	DRW010522SP
Membrane filter	DRW010525SP
Stainless steel sintered filter	HM46670SP
PTFE membrane filter with stainless steel grid	ASM212652SP
PTFE sintered filter	DRW244938SP

Probe installation

Duct installation kit	215619
Probe mounting clamp set, 10 pcs	226067
Probe mounting flange	226061
Probe holder, 5 pcs	ASM213382SP
Plastic M12 installation nuts, pair	18350SP
Flat extension cable 1 m (3 ft) ¹⁾	CBL210649SP

Connection adapters

4-20 mA loop power converter	UI-CONVERTER-ICB
Mounting bracket for converter	225979
USB cable for PC connection	219690
Connection cable for Indigo80 handheld indicator	262195SP
Connection cable for MI70 indicator	219980SP

Connection cables with open wires

+60 °C 0.3 m (+140 °F 1 ft)	HMP50Z032SP
+60 °C 1.2 m (+140 °F 4 ft)	HMP50Z120
+60 °C 3 m (+140 °F 9.8 ft)	HMP50Z300SP
+80 °C 1.5 m (+176 °F 5 ft)	225777SP
+80 °C 3 m (+176 °F 10 ft)	225229SP
+180 °C 1.5 m (+356 °F 5 ft) FEP	238025
+180 °C 3 m (+356 °F 10 ft) FEP	226902SP

¹⁾ Connection cable 219980SP is also needed if this cable is used with MI70 indicator.

Published by Vaisala | B210851EN-K © Vaisala 2024



INDUSTRIE AUTOMATION GRAZ Ing. W. Häusler GmbH AUTALER STRASSE 55 A-8074 RAABA-GRAMBACH
TEL: +43 316 405 105 FAX: +43 316 405 105 22 E-MAIL: OFFICE@IAG.CO.AT WWW.IAG.CO.AT